
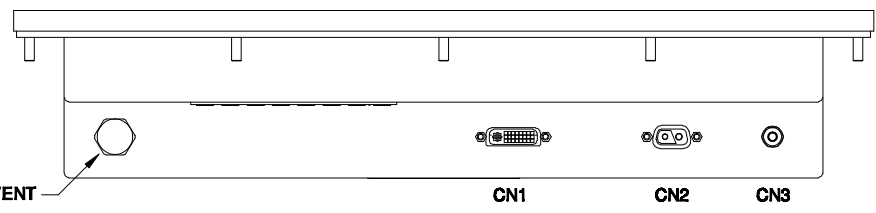
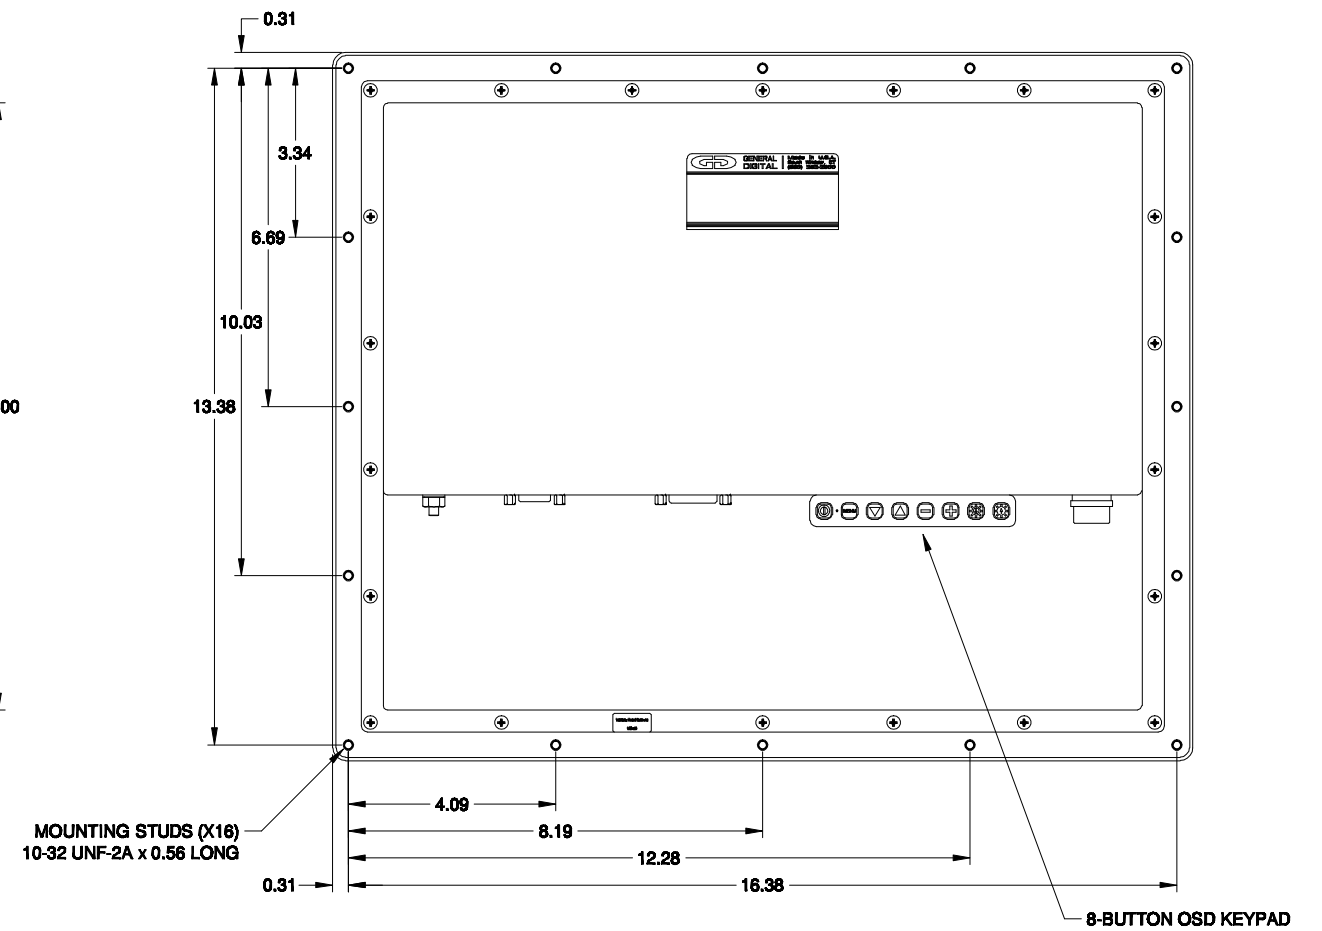
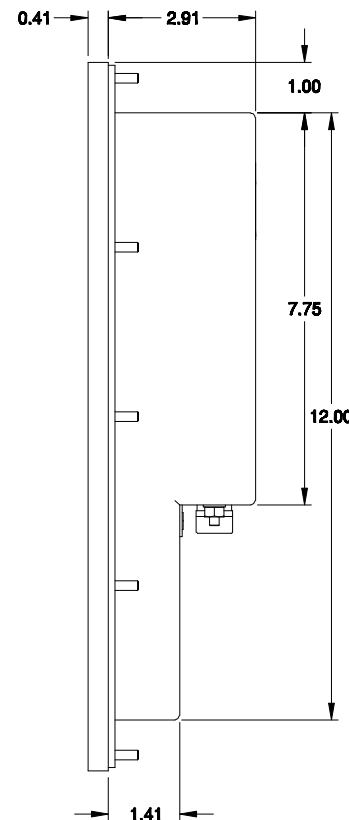
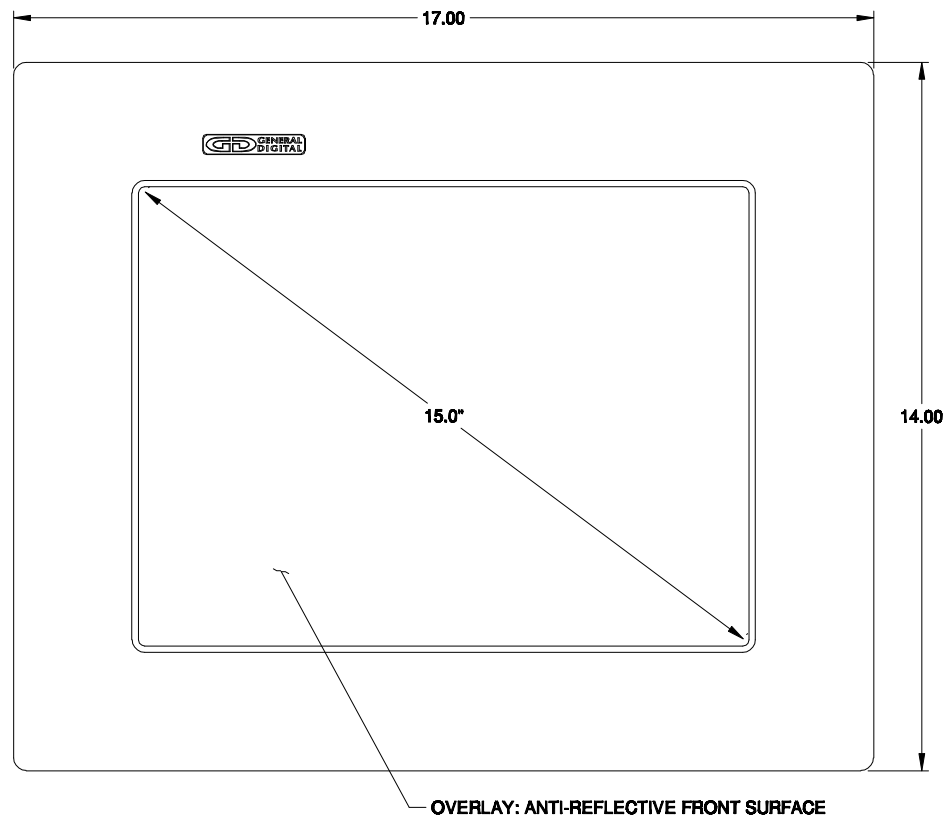
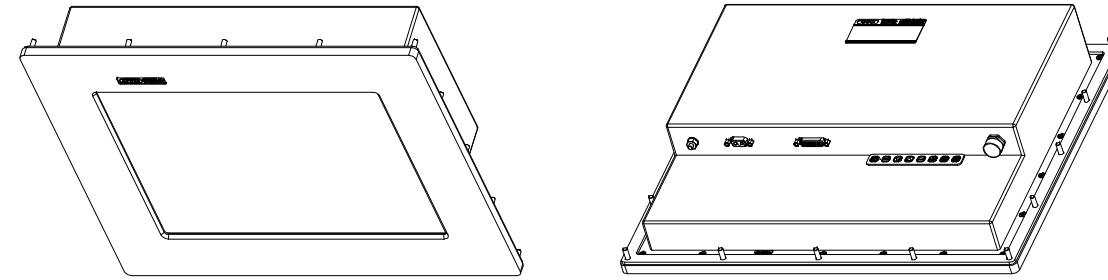


CUSTOMER APPROVAL

COMPANY	NAME (PRINT)
DATE	SIGNATURE

SBP-15X-9022-123-00-15-14-SA73

90-959-021

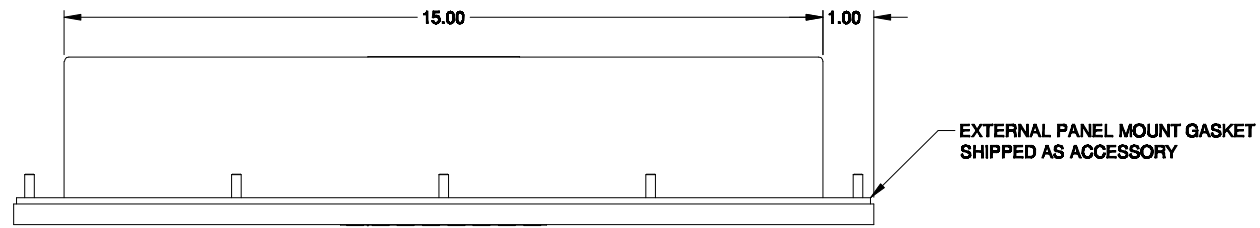

SHEET 1 OF 2

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF GENERAL DIGITAL AND IS NOT TO BE DISCLOSED, REPRODUCED OR PUBLISHED WITHOUT WRITTEN CONSENT FROM GENERAL DIGITAL. THIS DOCUMENT MUST BE RENDERED ILLEGIBLE WHEN BEING DISCARDED. © COPYRIGHT 2018. ALL RIGHTS RESERVED.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:
 FRACTIONS DECIMALS ANGLES
 ±1/32 .X ±.050 ±0° 30'
 .XX ±.031
 .XXX±.020

CONNECTOR CHART		
DESIGNATION	FUNCTION	TYPE
CN1	DVI-D VIDEO INPUT	DVI-D
CN2	+12 VDC INPUT	DE-2W2-S
CN3	GROUND STUD	10-32 UNF-2A

MECHANICAL OUTLINE ONLY. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. U.O.S. ALL DIMENSIONS ARE IN INCHES.	
APPROVALS	DATE
DRAWN C.P.	23-Jan-18
CHECKED S.B.	23-Jan-18
APPROVED J.H.	23-Jan-18
DO NOT SCALE DRAWING	



GENERAL DIGITAL
Engineering What's Next
 8 Nutmeg Road South, South Windsor, CT 06074
 (860) 282-2900 www.GeneralDigital.com

**BARRACUDA PANEL MOUNT
 15.0" XGA FLAT PANEL MONITOR**

B	CAGE CODE 1JA77	DWG. NO. 959-021-97	REV -1
----------	--------------------	------------------------	-----------

REV	DATE	ECN	DESCRIPTION	BY
-1	09-Feb-18	E005222	MOVED OSD KEYPAD TO REAR SURFACE	CP

CUSTOMER APPROVAL

COMPANY	NAME (PRINT)
DATE	SIGNATURE

SBP-15X-9022-123-00-15-14-SA73

90-959-021

UNIT SPECIFICATIONS		
FEATURE	VALUE	UNIT
DISPLAY		
SIZE (DIAGNOL)	15.0	INCHES
ACTIVE AREA	11.97 x 8.98	INCHES
RESOLUTION	1024 x 768	PIXELS
COLORS	16.7 MILLION (6-BIT + FRC)	
VIEWING ANGLE (H/V)	±80 / ±80	DEGREES
REFRESH RATE	60	Hz
OPTICAL		
BRIGHTNESS (MAX)	450	NITS
DIMMING RANGE	5 - 100%	
CONTRAST	600:1	
BACKLIGHT TYPE	LED (SINGLE RAIL)	
MONITOR POWER		
INPUT VOLTAGE	+24	VDC
POWER CONSUMPTION (EST)	30	WATTS
POWER SUPPLY		
INPUT VOLTAGE	90 - 264	VAC
INPUT FREQUENCY	47 - 63	Hz
POWER CONSUMPTION (EST)	35	WATTS
ENVIRONMENTAL		
OPERATING TEMPERATURE	-10 - +55	°C
STORAGE TEMPERATURE	-30 - +70	°C
HUMIDITY	0 - 100% RH NON-CONDENSING	
SEALING	IP-67 STANDARDS*	

DC POWER INPUT (CN2)	
DE-2W2-S	
PIN #	SIGNAL NAME
1	+24V
2	GND

ACCESSORIES:

90-1105-047 - EXTERNAL AC-DC POWER SUPPLY, INCLUDES AC LINE CORD

102-206-025 - EXTERNAL PANEL MOUNT GASKET

SHEET 2 OF 2

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF GENERAL DIGITAL AND IS NOT TO BE DISCLOSED, REPRODUCED OR PUBLISHED WITHOUT WRITTEN CONSENT FROM GENERAL DIGITAL. THIS DOCUMENT MUST BE RENDERED ILLEGIBLE WHEN BEING DISCARDED. © COPYRIGHT 2018. ALL RIGHTS RESERVED.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:
 FRACTIONS DECIMALS ANGLES
 ±1/32 .X ±.050 ±0° 30'
 .XX ±.031
 .XXX±.020

CONNECTOR CHART			MECHANICAL OUTLINE ONLY. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. U.O.S. ALL DIMENSIONS ARE IN INCHES.	
DESIGNATION	FUNCTION	TYPE	APPROVALS	DATE
CN1	DVI-D VIDEO INPUT	DVI-D		
CN2	+12 VDC INPUT	DE-2W2-S	DRAWN C.P.	23-Jan-18
CN3	GROUND STUD	10-32 UNF-2A	CHECKED S.B.	23-Jan-18
			APPROVED J.H.	23-Jan-18
DO NOT SCALE DRAWING				



**BARRACUDA PANEL MOUNT
15.0" XGA FLAT PANEL MONITOR**

REV	DATE	ECN	DESCRIPTION	BY
-1	09-Feb-18	E005222	MOVED OSD KEYPAD TO REAR SURFACE	CP

B	CAGE CODE	DWG. NO.	REV
	1JA77	959-021-97	-1